



## Dehumidification and ventilation for industrial processes and swimming pool



MADE IN ITALY



HiDew is proud to present a huge range of dehumidifiers for industrial processes, public and private pools, with a high efficiency heat recovery and air renewal system.











Every HiDew dehumidifier and recovery system has been designed to respond to an increasingly demanding market in terms of technology, reliability, design, compactness, efficiency, sound level, simplicity and installation ease.



**QUALITY FOR YOUR WELLBEING**

# HiDew

## Dehumidifiers

Design dehumidifiers for swimming pools		<b>DDS</b>	P. 4
Ductable dehumidifiers for swimming pools		<b>DCS</b>	P. 4
Vertical dehumidifiers for swimming pools		<b>DVS</b>	P. 6
Dehumidifiers for industrial processes		<b>ID</b>	P. 8
Dehumidifiers for swimming pools		<b>SP</b>	P. 8
Dehumidifiers with high air renewal		<b>SPR</b>	P. 10
Dehumidifiers for industries / swimming pools with temperature control		<b>IT/ST</b>	P. 12
Dehumidifiers with high air renewal and temperature control		<b>STR</b>	P. 14
Air conditioner with heat pump water condensed		<b>HPW</b>	P. 16
Air conditioner for cellars		<b>CCV</b>	P. 18



**DDS**

**DCS**

## DESIGN WALL-MOUNTED DEHUMIDIFIERS FOR SWIMMING POOLS




**DDS** and **DCS** series dehumidifiers with advanced control are completely autonomous and are conceived for wall-mounted installation in small private swimming pools.

DDS models are thought to be installed directly in the room to be dehumidified and the pleasant design is suitable also for other ambiances, such as museum, archives, libraries, churches, cellars and basements. The sober but elegant look eases the installation in public and private ambiances, generally characterized by a sophisticated design.

DCS models are thought for the installation in a technical room adjacent to the ambience to dehumidify: in this case, the installation requires supply and recover grilles.

The series consists of 11 models, from 46 up to 300 L/day. DDS and DCS dehumidifiers are completely autonomous in managing humidity: the control on board reads the ambient humidity and activates the dehumidification process when necessary: finally, the installation of these units is particularly simple.

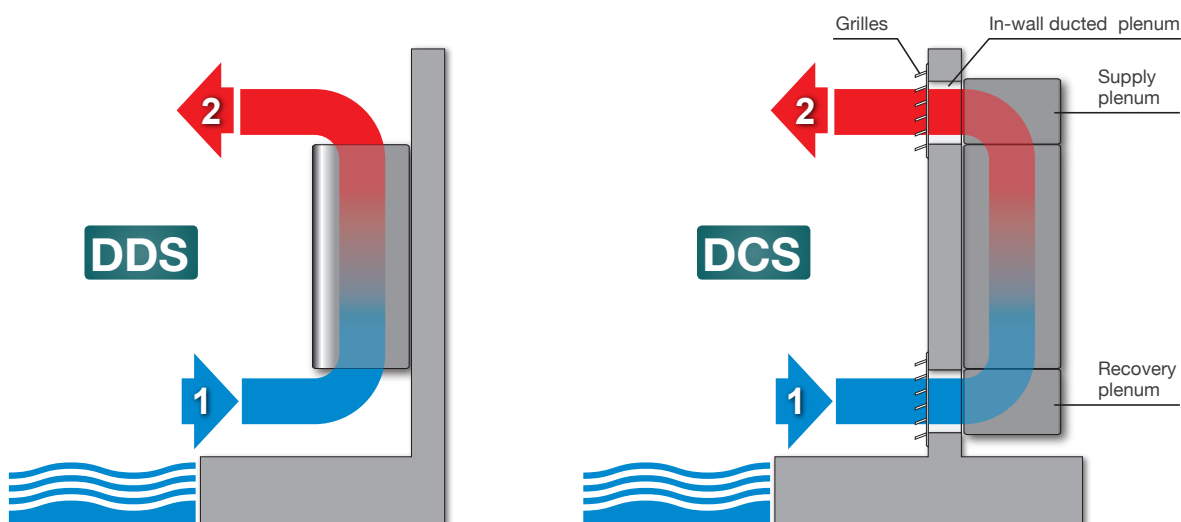

### DDS - DCS

#### Technical sheet of the range

Technical sheet of the range		040	050	060	070	090	100	160	190	210	230	300
Dehumidifying capacity (at 30°C / 80% R.H.)	L/24h	46	52	61	68	89	98	165	186	211	226	300
Nominal air flow	m³/h	350	450	500	600	700	800	1000	1200	1500	1500	2000
Hot water coil capacity <sup>(1)</sup>	kW	3,7	4,5	4,5	6,1	6,8	7,5	10,1	11,5	14,5	14,5	17,7
Load losses water without valve	kPa	8	11	11	25	30	36	14	18	32	32	43
Load losses water with valve	kPa	11	16	16	35	42	50	24	31	52	52	73
Electrical heater capacity	kW	1,5	1,5	1,5	2	3,6	3,6	4	4	7,2	7,2	7,2
Power consumption	kW	0,9	0,9	1	1	1,7	1,7	2,6	2,7	3,6	3,9	5
Dimensions L x H x D	mm	--- 850 x 780 x 280 ---			--- 1050 x 780 x 280 ---			--- 1350 x 850 x 330 ---			--- 1550 x 850 x 330 ---	
Refrigerant		----- R 410 A -----										
Electric power supply	V/ph/Hz	----- 230 / 1 / 50 -----									--- 400 / 3+N / 50 ---	
Working temperature range	°C	----- 12 - 39 -----										
Working humidity range	% r.h.	----- 45 - 95 -----										

(1) Hot water coil capacity declared at the following conditions: water T 80°C, ambient T 30°C.

#### Options:

- Hot water coil with 3-ways valve
- Electrical heaters
- Hot gas defrost
- Silent version
- Serial board RS485 for Modbus communication
- Kit for display at distance
- Feet kit for floor installation (DDS)
- Supply and recovery air plenum (DCS)



**DVS**

**VERTICAL DEHUMIDIFIERS FOR SWIMMING POOLS**



The new dehumidifiers of the range **DVS** with advanced control are completely autonomous and are conceived for a vertical installation in private swimming pools. The attractive design is perfectly suitable also to other ambiances, such as museums, archives and cellars.

DVS models are thought for an installation directly in the room that need to be dehumidified and the sober, but elegant, look eases the installation in public and private ambiances, generally characterized by a sophisticated design. This series consists of 7 models, from 68 up to 230 L/day.

The DVS dehumidifiers are completely autonomous in managing humidity: the control on board reads the ambient humidity and activates the dehumidification process when necessary: finally, the installation of these units is particularly simple.



**DVS**
**Technical sheet of the range**

Technical sheet of the range		070	090	100	160	190	210	230
Dehumidifying capacity (at 30°C/80% r.h.)	L/24h	67	92	99	161	182	213	225
Nominal air flow	m³/h	600	700	800	1000	1200	1400	1400
Hot water coil capacity <sup>(1)</sup>	kW	6,1	6,8	7,5	10,4	11,9	13,3	13,3
Load losses water without valve	kPa	23	28	33	25	31	35	35
Load losses water with valve	kPa	33	40	47	34	44	55	55
Electrical heaters capacity	kW	2	2	2	4	4	4	4
Power consumption	kW	1	1,5	1,6	2,4	2,6	3,8	3,8
Dimensions L x H x D	mm	550 x 330 x 1700			750 x 330 x 1700			
Refrigerant		R 410 A						
Electric power supply	V/ph/Hz	230 / 1 / 50					400 / 3+N / 50	
Working temperature range	°C	12 - 39						
Working humidity range	% r.h.	45 - 95						

(1) Hot water coil capacity declared at the following conditions: water T 80°C, ambient air T 30°C

**Options:**

- Hot water coil with 3-ways valve
- Electrical heaters
- Hot gas defrost
- Silent version
- Serial board RS485 for Modbus communication
- Cable for display at distance
- Display mounted on board
- Kit air supply on the top

Display mounted on board



**ID**

**SP**

## DEHUMIDIFIERS FOR SWIMMING POOLS AND INDUSTRY



The **ID** and **SP** range dehumidifiers are designed for use in high latent load environments requiring 24hrs/day operation. They are typically installed in environments such as public and private swimming pools, dairies, basements, ironing shops, curing cellars, warehouses and wherever a lack of humidity control can damage the structure or the product.

### Technical sheet range **ID - SP**


		<b>0130</b>	<b>0160</b>	<b>0190</b>	<b>0210</b>	<b>0260</b>	<b>0300</b>	<b>0350</b>	<b>0450</b>	<b>0580</b>
Dehumidifying capacity	L/24h	128	157	190	210	268	302	358	452	581
Air flow rate	m³/h	1200	1600	1600	2000	2800	2800	3800	4000	4800
Hot water coil capacity	kW	9,8	9,8	9,8	16,5	17	17	26,5	26,5	27
Electrical heaters capacity	kW	4	5	5	6	6	6	6	11	11
Electric power supply	V/ph/Hz	I----- 230/1/50 -----I I----- 400/3/50 -----I								
Dimensions L X D X H	mm	I---- 700 x 550 x 900 -----I I----- 700 x 850 x 900 -----I I----- 830 x 850 x 1350 -----I								

### Technical sheet range **ID - SP**

		<b>0750</b>	<b>0950</b>	<b>1100</b>	<b>1400</b>	<b>1500</b>	<b>1700</b>	<b>1900</b>	<b>2200</b>	<b>3000</b>
Dehumidifying capacity	L/24h	760	955	1120	1380	1480	1710	1870	2180	2960
Air flow rate	m³/h	7000	8200	11000	12500	13000	15000	15000	17000	25000
Hot water coil capacity	kW	48	55	76	83	98	107	107	118	168
Electrical heaters capacity	kW	22	22	36	43	43	54	54	54	87
Electric power supply	V/ph/Hz	I----- 400/3/50 -----I								
Dimensions L X D X H	mm	1000 x 1400 x 1350 -I- 1000 x 1950 x 1640 -I----- 1000 x 2500 x 1640 -----I 1000 x 3390 x 1640								

All the values refer to the following conditions: Air temperature 30°C, Relative Humidity 80%, Water temperature 80/70°C



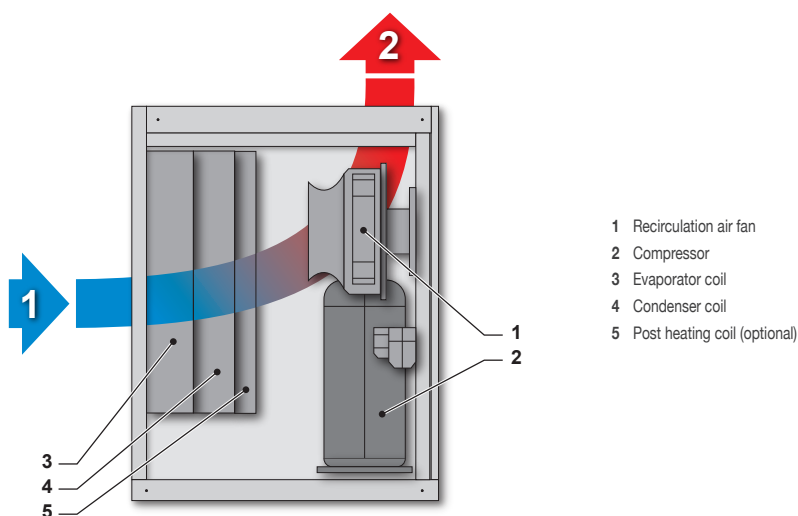

**Options:**

	STANDARD CONTROL (*)	ADVANCED CONTROL
Filter holder frame for suction ducting with high efficiency air filters	✓	✓
Mechanical hygrostat	✓	--
Electronic chrono – hygrostat	✓	--
Hot water coil with 3-ways valve	✓	✓
Chilled water coil with 3-ways valve	✓	✓
Silent version -2 dB(A)	✓	✓
Soft-start	✓	✓
Manometers	✓	✓
Hot gas defrost	✓	✓
De-superheater	✓	✓
Centrifugal fan with high prevalence	✓	✓
Electronic radial fans	--	✓
ACF - Automatic Control Flow (only with electronic radial fans)	--	✓
Clock card – time scheduling	--	✓
Dirty filters sensor	--	✓
Remote user terminal including 20 m cable	--	✓
TH probe for duct installation	--	✓
Serial board Modbus, Lonworks, Bacnet, Konnex	--	✓
External version (outside temperature down to -10°C)	✓	✓
Panels thermal insulation, thickness 20 mm	✓	✓
Pivoting wheels	✓	✓

✓ : Available.

-- : Not available.

(\*) : Available for models up to 0950.



## SPR

### SWIMMING POOL DEHUMIDIFIERS WITH ENHANCED AIR RENEWAL AND HIGH-EFFICIENCY HEAT RECOVERY SYSTEM



The **SPR** units are ideal for swimming pools that not only require dehumidification but must also renew the indoor air without dispersing heat outdoors. Up to 80% yield is guaranteed by the high-efficiency recovery system. The SPR units represent the state-of-the-art in terms of efficiency, reliability and emitted sound power. The SPR range only uses electronic radial fans with high-energy efficiency incorporated inverter.

HiDew has developed a sophisticated adjustment software to adjust the SPR dehumidifiers air flow rate.

This software sets, measures and controls the air flow rate, eliminating any chance of incorrectly calculating the ducts' pressure drops, thereby making dehumidifier installation and system commissioning extremely easy and quick and reducing installation times and costs.


Technical sheet of the range **SPR**

		<b>0130</b>	<b>0160</b>	<b>0190</b>	<b>0210</b>	<b>0260</b>	<b>0300</b>	<b>0350</b>	<b>0450</b>	<b>0580</b>
Dehumidifying capacity	L/24h	128	157	190	210	268	302	358	452	581
Recirculation air flow rate	m³/h	1200	1600	1600	2000	2800	2800	3800	4000	4800
Fresh air flow rate	m³/h	0 - 1200	0 - 1200	0 - 1200	0 - 2000	0 - 2000	0 - 2000	0 - 2000	0 - 2000	0 - 2000
Hot water coil capacity	kW	9,8	9,8	9,8	16,5	17	17	26,5	26,5	27
Electrical heaters capacity	kW	5	5	5	6	6	6	6	11	11
Heat recovery system efficiency	%	70	70	70	70	70	70	70	70	70
Electric power supply	V/ph/Hz	I----- 230/1/50 -----I				I----- 400/3/50 -----I				

Technical sheet of the range **SPR**

		<b>0750</b>	<b>0950</b>	<b>1100</b>	<b>1400</b>	<b>1500</b>	<b>1700</b>	<b>1900</b>	<b>2200</b>	<b>3000</b>
Dehumidifying capacity	L/24h	760	955	1120	1380	1480	1710	1870	2180	2960
Recirculation air flow rate	m³/h	7000	8200	11000	12500	13000	15000	15000	17000	25000
Fresh air flow rate	m³/h	0 - 6000	0 - 6000	0 - 11000	0 - 12500	0 - 13000	0 - 15000	0 - 15000	0 - 17000	0 - 25000
Hot water coil capacity	kW	48	55	76	83	98	107	107	118	168
Electrical heaters capacity	kW	22	22	36	43	43	54	54	54	87
Heat recovery system efficiency	%	70	70	70	70	70	70	70	70	70
Electric power supply	V/ph/Hz	I----- 400/3/50 -----I								

Dehumidification power in following conditions: Air Temperature 30°C, Relative Humidity 80% net of contribution of air renewal  
Recovery system efficiency with indoor 26°C/60% RH outdoor -5°C/80% RH conditions

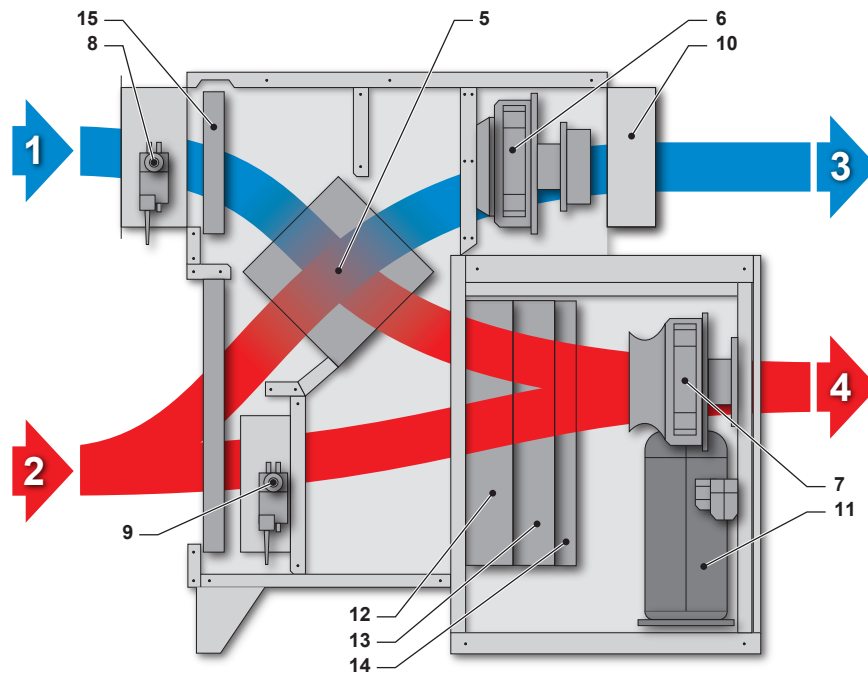

- |  |                                    |
|--|------------------------------------|
| 1 Inlet fresh outdoor air flow                       | 9 Calibration damper               |
| 2 Indoor recirculation air flow                      | 10 Discharged air gravity damper   |
| 3 Expelled outdoors air flow                         | 11 Compressor                      |
| 4 Supply air flow indoors                            | 12 Evaporator coil                 |
| 5 High-efficiency crossed flows heat recovery system | 13 Condenser coil                  |
| 6 Exhaust air exhaust fan                            | 14 Reheat coil (optional)          |
| 7 Recirculation air fan                              | 15 Outdoor fresh air filter        |
| 8 Outdoor air damper                                 | 16 Indoor recirculation air filter |

#### Options:

- High efficiency air filters
- Hot water coil with 3-ways valve
- Chilled water coil with 3-ways valve
- Free cooling
- Silent version -2 dB(A)
- Soft-start
- Manometers
- Hot gas defrost
- De-superheater
- De-superheater for swimming pool water
- ACF - Automatic Control Flow
- Clock card – time scheduling
- Dirty filters sensor
- Remote user terminal including 20 m cable
- TH probe for duct installation
- Serial board Modbus, Lonworks, Bacnet, Konnex
- External version (outside temperature down to -10°C)
- Panels thermal insulation, thickness 20 mm

**IT**

**ST**

## DEHUMIDIFIERS FOR INDUSTRIES / SWIMMING POOLS WITH TEMPERATURE CONTROL



The dehumidifiers of the series **IT** and **ST** are conceived for the use in high latent load environments requiring 24hrs/day operation. Thanks to the temperature control function, with an external condenser, these units grant a full control, not only of the humidity, but also of the ambient temperature.

Therefore, these units are suitable for those applications in which the contemporary control of both the parameters is required, such as swimming pools, food storage, salami and cheese seasoning processes and wherever the non-control of temperature and humidity can damage the goods.


**Technical sheet range IT - ST**

		<b>0130</b>	<b>0160</b>	<b>0190</b>	<b>0210</b>	<b>0260</b>	<b>0300</b>	<b>0350</b>	<b>0450</b>	<b>0580</b>
Dehumidifying capacity	L/24h	128	157	190	210	268	302	358	452	581
Air flow rate	m³/h	1200	1600	1600	2000	2800	2800	3800	4000	4800
Cooling power	kW	6,5	8	10	11	15	16	19	23	30
Hot water coil capacity	kW	9,8	9,8	9,8	16,5	17	17	26,5	26,5	27
Electrical heaters capacity	kW	4	5	5	6	6	6	6	11	11
Electric power supply	V/ph/Hz	I----- 230/1/50 -----I I----- 400/3/50 -----I								
Dimensions L X D X H	mm	I---- 700 x 550 x 900 -----I I----- 700 x 850 x 900 -----I I----- 830 x 850 x 1350 -----I								

**Technical sheet range IT - ST**

		<b>0750</b>	<b>0950</b>	<b>1100</b>	<b>1400</b>	<b>1500</b>	<b>1700</b>	<b>1900</b>	<b>2200</b>	<b>3000</b>
Dehumidifying capacity	L/24h	760	955	1120	1380	1480	1710	1870	2180	2960
Air flow rate	m³/h	7000	8200	11000	12500	13000	15000	15000	17000	25000
Cooling power	kW	38	50	56	66	75	86	96	110	148
Hot water coil capacity	kW	48	55	76	83	98	107	107	118	168
Electrical heaters capacity	kW	22	22	36	43	43	54	54	54	87
Electric power supply	V/ph/Hz	I----- 400/3/50 -----I								
Dimensions L X D X H	mm	1000 x 1400 x 1350 -I- 1000 x 1950 x 1640 -I----- 1000 x 2500 x 1640 -----I 1000 x 3390 x 1640								

All the values refer to the following conditions: Air temperature 30°C, Relative Humidity 80%, Water temperature 80/70°C

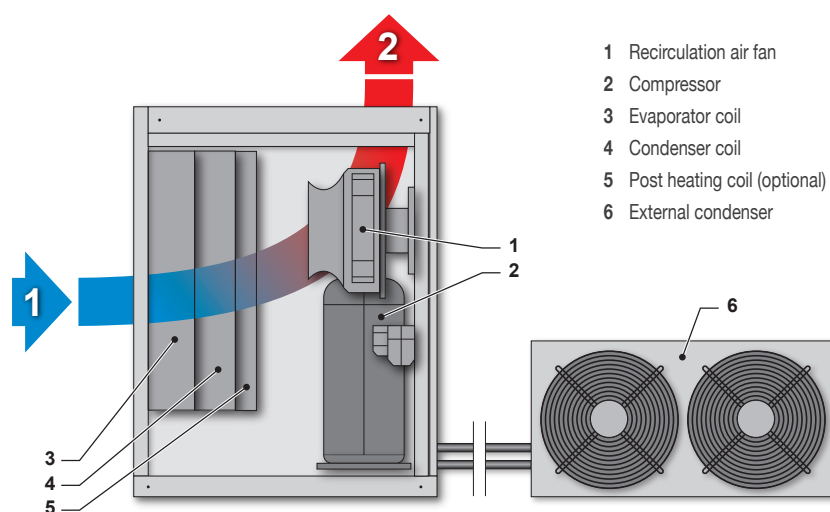
**Options:**

	STANDARD CONTROL (*)	ADVANCED CONTROL
Filter holder frame for suction ducting with high efficiency air filters	✓	✓
Mechanical hygostat	✓	--
Electronic chrono – hygostat	✓	--
Silent version -2 dB(A)	✓	✓
Soft-start	✓	✓
Manometers	✓	✓
Hot gas defrost	✓	✓
De-superheater	✓	✓
Centrifugal fan with high prevalence	✓	✓
Electronic radial fans	--	✓
ACF - automatic control flow (only with electronic radial fans)	--	✓
Clock card – time scheduling	--	✓
Dirty filters sensor	--	✓
Remote user terminal including 20 m cable	--	✓
TH probe for duct installation	--	✓
Serial board Modbus, Lonworks, Bacnet, Konnex	--	✓
External version (outside temperature down to -10°C)	✓	✓
Panels thermal insulation, thickness 20 mm	✓	✓
Pivoting wheels	✓	✓

✓ : Available.

-- : Not available.

(\*) : Available for models up to 0950.





# STR

## DEHUMIDIFIERS WITH HIGH AIR RENEWAL AND TEMPERATURE CONTROL



The **STR** models are the ideal units for industries and swimming pools that require not only dehumidification, but also a high air renewal, without dispersing the internal heat outdoors, and the temperature control. With an efficiency of the recovery up to 80%, these units represent the state-of-art in terms of efficiency, reliability and emitted sound power. The STR range only uses electronic radial fans with high-energy efficiency inverter integrated. Thanks to the temperature control function, with an external condenser, these units grant a full control, not only of the humidity, but also of the ambient temperature. Therefore, these units are suitable for those applications in which the contemporary control of both the parameters is required.

Moreover, thanks to a sophisticated software, developed in HIDEW, the air flow can be set, measured and controlled: it eliminates any chance of incorrect calculation of load losses. Finally, the installation and the first start of these units results simple, quick and cheap.


### Technical sheet range STR

		0130	0160	0190	0210	0260	0300	0350	0450	0580
Dehumidifying capacity	L/24h	128	157	190	210	268	302	358	452	581
Recirculation air flow rate	m³/h	1200	1600	1600	2000	2800	2800	3800	4000	4800
Fresh air flow rate	m³/h	0 - 1200	0 - 1200	0 - 1200	0 - 2000	0 - 2000	0 - 2000	0 - 2000	0 - 2000	0 - 2000
Cooling power	kW	6,5	8	10	11	15	16	18	23	30
Hot water coil capacity	kW	9,8	9,8	9,8	16,5	17	17	26,5	26,5	27
Electrical heaters capacity	kW	5	5	5	6	6	6	6	11	11
Heat recovery system efficiency	%	70	70	70	70	70	70	70	70	70
Electric power supply	V/ph/Hz	I----- 230/1/50 -----I				I----- 400/3/50 -----I				

### Technical sheet range STR

		0750	0950	1100	1400	1500	1700	1900	2200	3000
Dehumidifying capacity	L/24h	760	955	1120	1380	1480	1710	1870	2180	2960
Recirculation air flow rate	m³/h	7000	8200	11000	12500	13000	15000	15000	17000	25000
Fresh air flow rate	m³/h	0 - 6000	0 - 6000	0 - 11000	0 - 12500	0 - 13000	0 - 13000	0 - 13000	0 - 13000	0 - 25000
Cooling power	kW	38	50	56	66	75	86	96	110	148
Hot water coil capacity	kW	48	55	76	83	98	107	107	118	168
Electrical heaters capacity	kW	22	22	36	43	43	54	54	54	87
Heat recovery system efficiency	%	70	70	70	70	70	70	70	70	70
Electric power supply	V/ph/Hz	I-----				400/3/50 -----I				

Dehumidification power in following conditions: Air Temperature 30°C, Relative Humidity 80% net of contribution of air renewal  
Recovery system efficiency with indoor 26°C/60% RH outdoor -5°C/80% RH conditions

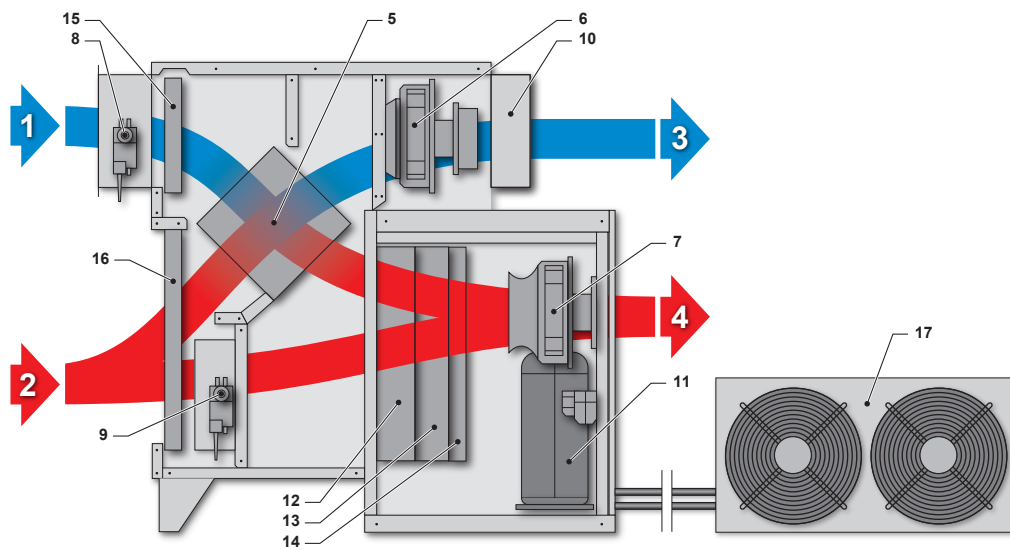

- |  |                                  |                                    |
|--|----------------------------------|------------------------------------|
| 1 Inlet fresh outdoor air flow                       | 7 Recirculation air fan          | 13 Condenser coil                  |
| 2 Indoor recirculation air flow                      | 8 Outdoor air damper             | 14 Reheat coil (optional)          |
| 3 Expelled outdoors air flow                         | 9 Calibration damper             | 15 Outdoor fresh air filter        |
| 4 Supply air flow indoors                            | 10 Discharged air gravity damper | 16 Indoor recirculation air filter |
| 5 High-efficiency crossed flows heat recovery system | 11 Compressor                    | 17 External condenser              |
| 6 Exhaust air exhaust fan                            | 12 Evaporator coil               |                                    |

#### Options:

- High efficiency air filters
- Hot water coil with 3-ways valve
- Chilled water coil with 3-ways valve
- Free cooling
- Silent version -2 dB(A)
- Soft-start
- Manometers
- Hot gas defrost
- De-superheater
- De-superheater for swimming pool water
- ACF - Automatic Control Flow
- Clock card – time scheduling
- Dirty filters sensor
- Remote user terminal including 20 m cable
- TH probe for duct installation
- Serial board Modbus, Lonworks, Bacnet, Konnex
- External version (outside temperature down to -10°C)
- Panels thermal insulation, thickness 20 mm

## HPW

### AIR CONDITIONER WITH HEAT PUMP WATER CONDENSED



The range of **HPW** air conditioner with heat pump water condensed, are conceived for ambiances that need a conditioning by heating and/or cooling 24hrs/day. They are typically installed in offices, but the technical characteristics make them perfect also for other ambiances, such as museum, libraries, archives, places of religious worship, warehouses, cellars and other places that require a controlled air conditioning, in order to grant the comfort.

The air conditioners with heat pump water condensed, are completely autonomous and, by standard, they are supplied with temperature probes. Their simple installation requires a condensate drain, water (also from geothermal source) and power supply.

The top-quality refrigeration, hydraulic, aeraulic and electric components, make HPW units the state of the art air conditioners in terms of efficiency and reliability. HiDew HPW air conditioners have been designed to make the ordinary and extraordinary maintenance easy and quick.

The HPW range consists of 3 models, with air flows from 400 to 650 m<sup>3</sup>/h.

**Technical sheet of the range**

		HPW 040	HPW 050	HPW 065
Summer total cooling power <sup>(1)</sup>	kW	2,4	3,0	4,2
Absorbed power compressor in summer <sup>(1)</sup>	kW	0,5	0,7	1,0
Winter heating power <sup>(2)</sup>	kW	2,7	3,3	4,5
Absorbed power compressor in winter <sup>(2)</sup>	kW	0,6	0,8	1,1
Nominal air flow	m³/h	400	500	650
Available static pressure	Pa	20	20	20
Electric power supply	V/ph/Hz	----- 230/1/50 -----		
Minimum water flow to the exchanger	l/min	5	8	8
Water load losses	kPa	22	30	28
Functioning limitations air in summer	°C	----- Min 20 °C / Max 35 °C -----		
Functioning limitations air in winter	°C	----- Min 15 °C / Max 28 °C -----		
Functioning limitations water in summer	°C	----- Min 15 °C / Max 45 °C -----		
Functioning limitations water in winter	°C	----- Min 15 °C / Max 25 °C -----		
Dimensions L x D x H	mm	----- 1050 x 280 x 720 -----   ----- 1250 x 280 x 720 -----		
Weight	Kg	44	45	60

(1) Ambience air 27°C / r.h. 50%

(2) Ambience air 20°C / water to evaporator 15°C

**Options:**

- Silent version
- RS 485 serial board
- Faucet for plant calibration
- Anti-fire probe



## CCV

## AIR CONDITIONER FOR CELLARS

The air conditioners **CCV** - **CCA** - **CCW** have been especially developed to keep the indoor temperature and humidity in a really close range; the typical applications are wine rooms, laboratories, IT.

The nice and compact design can match all the requirements in terms of space saving, easy installation and aesthetic result.

The unit is monobloc (CCV, CCW); CCA has an additional remote condenser for outdoor installation.

### Working models:

- Heating
- Cooling
- Humidification
- Dehumidification



The range of air conditioners for cellars has been extended adding to the existing monobloc air-cooled unit “CCV”, the “CCA” split air-to-air version with remote air condenser for outdoor installation and the “CCW” water-to-air monobloc version.

Summarizing the 3 versions are:

- **CCV 0450** = Air-to-air, monobloc, 4 connections for fresh air duct, d. 160 mm.
- **CCA 0450** = Air-to-air, split, outdoor condenser with refrigerant connections.
- **CCW 0450** = Water-to-air, monobloc.

### Focus on technology:

- Electrical heating
- Refrigerant cooling circuit
- Sunked electrodes humidifier
- Recirculation fan: electronic radial with brushless motor and inverter, that can be modulated from 0 up to 100%
- Condensation fan: electronic radial with brushless motor and inverter, that can be modulated from 0 up to 100% (CCV and CCA models)
- Modulating water valve (CCW model) + modulation condensing control
- Temperature and humidity probe on board with close tolerance +/- 0,5%
- Advanced and programmable control with available remote display
- Water sanitization system
- Time-bands program
- Access and unit maintenance from the front

### Advantages:

- Monobloc extremely compact unit
- Nice design
- Connection with the aeraulic system compatible with the new HiDew air distribution devices
- Short installation time
- No needs for refrigerant technician neither for refrigerant gas empty or fill in operations (CCV and CCW models)
- The risk of installation faults is extremely reduced, that is the long term reliability and low energy cost will be assured
- Circular connections nr° 6 x 160 mm (CCV model)
- Circular connections nr° 2 x 160 mm (CCA and CCW models)




		CC. 450		
Technical sheet		V	A	W
Cooling power <sup>(*)</sup>	Watt	2150	2200	2250
Air flow	m³/h	----- Variable from 350 to 450 -----		
Available static pressure	Pa	180	180	180
Available static pressure (condenser side)	Pa	150	220	-
Electric heater	Watt	1500	1500	1500
Power consumption <sup>(*)</sup>	Watt	1260	1260	1160
Power consumption, including electric heater <sup>(*)</sup>	Watt	2760	2760	2660
Dimensions L x H x D	mm	----- 650 x 1645 x 450 -----		
Refrigerant	Type	R 410 A	R 410 A	R 410 A
Electric power supply	V/ph/Hz	----- 230 / 1 / 50 -----		
Inside operating limits	°C	----- from 15 to 30 -----		
Suggested inside temperature conditions	°C	----- from 18 to 20 -----		
Outside operating limits – temperature	°C	----- from -5 to +35 -----		
Outside operating limits - humidity	%u.r.	----- 45 - 95 -----		

(\*) internal conditions 18°C / 80% R.H, - external air 30°C

#### Options:

- Steam humidifier
- Electrical heater
- RS485 Serial board
- Silent version
- F6 high efficiency filter, inside air
- Air suction from the rear
- Kit air connection for fresh air duct  
(composed by air duct 10 m, d.160 mm and n° 4 wall flanges)

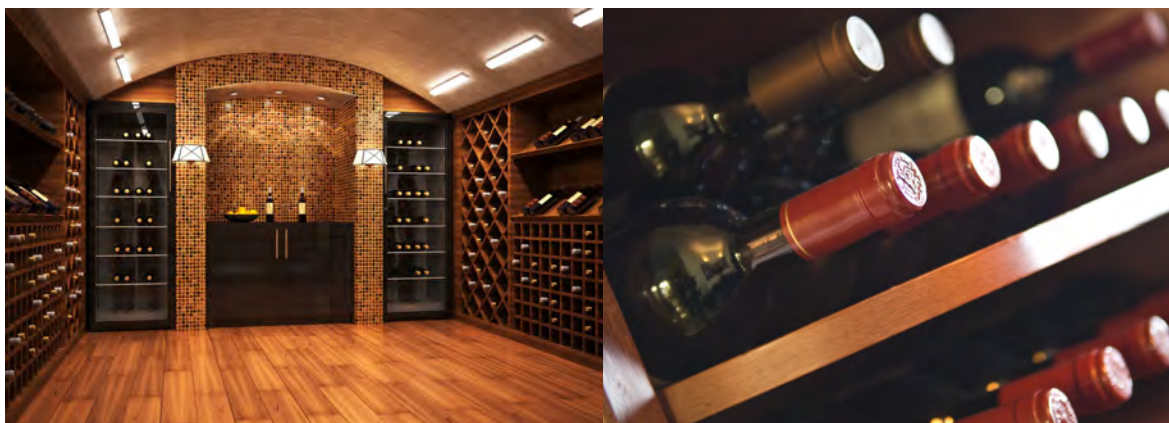



#### **HiDew S.r.l.**

Headquarter : Via dell'artigianato, 1 35020 San Pietro Viminario (PD) - Italy  
Phone: +39 049 9588510

Registered Office : Viale Spagna, 31/33 35020 Tribano (PD) - Italy  
Phone: +39 049 9588511 Fax: +39 049 9588522

[www.hidew.it](http://www.hidew.it) [info@hidew.it](mailto:info@hidew.it)

